


V I D E O

4 X 1 Video Switcher

Sequence 2 to 4 Inputs through 1 Output

V
S
4
X
1

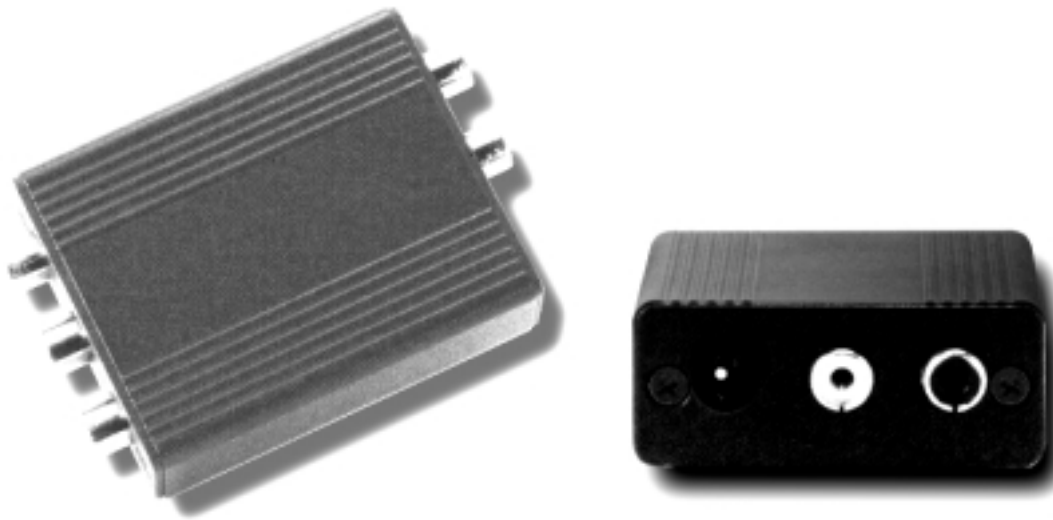

The NetMedia VS4X1 Video Switcher allows 2 to 4 baseband video sources to be sequenced through 1 output. Great for surveillance and monitoring in commercial, residential, and specialty applications. Combine the sequenced output with a NetMedia Digital Channel Modulator to create your own TV channel and view the signal on multiple TVs.

Features:

- Supports NTSC or PAL format in Color or B/W
- Selectable for 2 to 4 Inputs
- Selectable for 1-63 second timing
- Microprocessor controlled
- Memory retained during power outages
- Ideal for battery powered applications
- Rugged aluminum enclosure
- Includes Wall Transformer
- 1 Year Limited Warranty

Specifications

Switching Time User Selectable:	1 - 63 Seconds
Video Frequency Response	
Total Bandwidth:	12 Mhz.
Video Crosstalk:	-70 db
Video Inputs:	4 - RCA, 75 Ohm BNC Adapter Option
Video Output:	1 - RCA, 75 Ohm BNC Adapter Option
Power Requirement:	12V DC 100mA CL2, UL Approved Indoor Use Only
Size:	3.2" x 2.2" x 0.9"
Weight:	3.5 oz.

S
W
I
T
C
H
E
R
S



10940 North Stallard Place, Tucson, Arizona 85737
(520) 544-4567 Fax: (520) 544-0800
www.netmedia.com